





## LGT-624S Raised/Concrete/Trunking system floor box

### Features:

1. BS switch socket accessories: optional two 86\*146 type twins switch socket compartments or four 86\*86 type switch socket.
2. More plug top clearance: side-mounting installation of switch socket.
3. Protect opening system: Easy grip recessed lifting handle and only be opened by pulling both opening clips at the same time. The clips of floor boxes are self-positioning and secure the fastening.
4. More higher galvanized steel box: 85mm height.

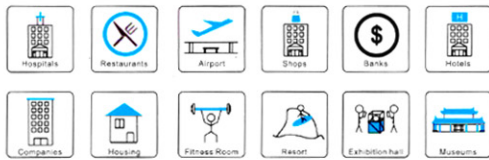

### Outline Drawing:

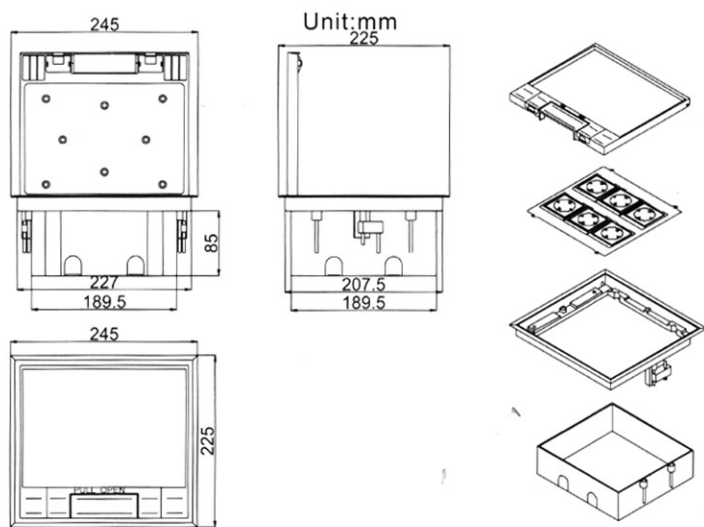

(Image is for reference only.)

### Technical Parameters :

Parameter	Description
Color	Grey,Black
Material	ABS, galvanized steel
Overall Frame & Lid (mm)	245*225
Compact floor cut-out(mm)	213*233
Thickness of concavity/	8
Frame lid recess (mm)	
Installation depth(mm)	85
Plug top clearance(mm)	13~48
Available outlet modules	side-mounting 4 gang 86*86 switch socket

### Installation Guide

1. Remove the panel from the bottom box along with the electrical modules.
2. Fix the flooring with spare screws on the bottom box and place it in the embedded hole.
3. The flooring surface shall be at least level with the ground or 20mm below the ground.
4. Remove flooring surface, Insert the 10--12mm lead head into the terminal of floor box.
5. Fix the panel to the bottom box with screws.

