

Features:

1. Application: Recessed stage floor box provides versatile solution to accessing power, audio and visual equipment through floor .
2. Lid degree against floor:90/180 degree.
3. Hinged lid thickness over 4~4.5m , static pressure over 1000N .
4. Cold-rolled Steel box thickness over 1.5~2.0mm with powder coated..

Cable Exit Protective Port



Technical Parameters :

Parameter	Description
Panel Material	Brass alloy(H62)/Stainless steel(304)
Panel Dimension(mm)	120*120
Cutout(mm)	110*110
Capacity of modules	3 ways modules

Brass




Alu alloy



Stainless



Outline Drawing: Unit:mm

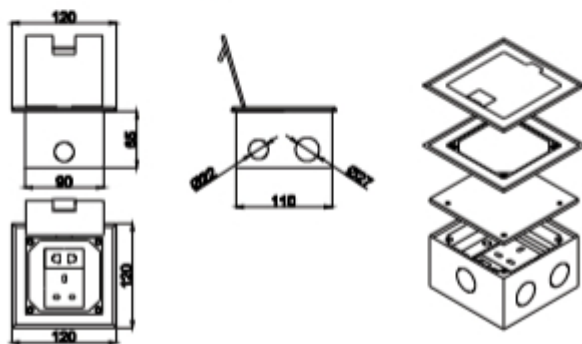

(Image is for reference only.)

Package:12 Pcs inner box into a master carton.Poly bag with box packing.

Installation Guide

1. Remove the panel from the bottom box along with the electrical modules.
2. Fix the flooring with spare screws on the bottom box and place it in the embedded hole.
3. The flooring surface shall be at least level with the ground or 20mm below the ground.
4. Remove flooring surface ,insert the 10--12mm lead head into the terminal of floor box.
5. Fix the panel to the bottom box with screws.

