■ Specifications

Model				HC3800			
Projection system				DLP™system			
Panel specs	Panel s	size		0.65" DMD, Aspect ratio 16:9, 12deg.LVDS, DDP3021			
	Numbe	r of pixels		1920x1080 (Total pixels 2,073,600)			
	Drive s	ystem		DMD reflection system			
	Array			Stripe pattern			
Optical specs	Lens	Zoom / focus operation		Manual focus & zoom / zoom ratio=1.5:1 w/ trigger			
	Lens	f		f=20.6mm - 30.1mm			
	Light so	ource lamp		230W (at standard mode), 190W (at low mode)			
	Optical	system		Time-division color separation / composition system			
Color wheel				6 segment (RGB RGB) x4			
Projection screen size				40"-300"			
Throw ratio				1.38 - 2.06			
	Brightn	ess		1300lm (Max)			
	Contra	st ratio		650:1 ANSI Contrast (Estimated 4,000:1 Full ON Full OFF)			
Images	Resolu	tion	PC input	VGA 640x480 - 1920x1080			
	Coon fr		Horizontal	15-80kHz			
	Scann	equency	Vertical	50-85Hz			
Input signal system	Video			NTSC, NTSC4.43, PAL (including PAL-M and N), SECAM, PAL-60 Video input: 480i/p, 576i/p, 1080i 60/50, 1080p 60/50/24, 720p 60/50			
System	PC			PC/AT compatibles, Mac, PC98			
Input		PC input	Mini D-Sub 15 pin	1 terminal			
		HDMI input	HDMI terminal	1 terminal (Ver.1.3)			
	Video	Composites	RCA terminal	1 terminal			
		S	S-Video terminal	1 terminal			
		Components	RCA terminal	1 terminal (component can be also input to Mini D-Sub 15 pin)			
	Serial / RS-232C standard			1 terminal (Mini DIN 8 pin)			
Functions	Gamm	a mode		3 patterns + 2 users			
	Digital keystone (Vertical)			±15 steps			
	Power source voltage			AC100V 50/60Hz			
	Power consumption (W)			340 (at waiting 0.4W)			
	Weight (kg / lbs)			3.6 / 7.9			
	Main unit dimensions (WxDxH)			345x270x129mm / 13.6"x10.6"x5.1" (excluding height adjustment)			
Other	Supplie	ed accessories		Power cord, Remote control, AA batteries (x2), RGB signal cable, Lens cap, Lamp replacement tray			
	Optiona	al accessories		Ceiling Mount (PROJ-UCM-PRO2), Ceiling Mount Accessory (PROJ-FCA), Replacement Lamp (VLT-HC3800LP)			
	Warrar	ty		2-years parts and labor, 1-year or 500 hours on lamp (whichever comes first)			
				*All brand and product names are trademarks or registered trademarks of their respective companies			

All brand and product names are trademarks or registered trademarks of their respective companies.

Terminals

■ Option

Replacement Lamp



VLT-HC3800LP

MITSUBISHI DIGITAL ELECTRONICS AMERICA, INC.

Presentation Products Division Phone: 888.307.0349 www.mitsubishi-presentations.com

LITHC3800



MITSUBISHI ELECTRIC SALES CANADA, INC.

Display & Imaging Solutions Division Phone: 905.475.7728 www.mitsubishielectric.ca

New publication, effective October 2009. Specifications subject to change without notice.








Enjoy it all in high-definition on 100"+ screens

Imagine it... Mitsubishi technology that brings you hours of viewing pleasure in the comfort of your own home. Easy to set-up and operate - the HC3800 creates beautiful, high-definition (HD) imagery, bringing movies and TV programs to life with vivid, sharp colors and adding new meaning to the word "excitement" when playing HD video games. An you can enjoy it all on a large 100"+ screen while relaxing on your living room sofa.

Finally, our HC3800 is an affordable full-HD projector that spares nothing to add new dimensions in viewing pleasure. It's an amazing level of beauty and excitement you need to experience with your own eyes.

The latest 0.65 DLP™ chip

A key feature of the HC3800 is the latest Digital Light Processing (DLPTM) chip incorporating a new digital micromirror device (DMD) comprised of densely embedded micromirrors. A smaller mirror cavity diameter and narrower gaps between the mirrors improve the aperture ratio of the innovative chip, and reflective light diffusion is greatly reduced Digital Micro-Mirror Device by improving the wiring below the mirror section. The mirrors are controlled to tilt repeatedly several thousand times per second for smooth, true reproduction of finely detailed images with no noise or deterioration.





High Brightness and High Contrast

A fixed iris provides both enhanced brightness and contrast for clear, sharp images. Even in a relatively bright living room with the curtains open, movies, sports and other programs from high-definition broadcasting and Blu-ray sources are fully enjoyed in amazing high-definition.

1.5x Short-throw HD Zoom Lens

A newly developed short-throw zoom lens is on the HC3800. The 4-cluster, 13-piece all-glass lens provides excellent focusing performance with 1.5x magnification of high-definition images. Improvements in image depth and the lens aperture make it possible for deep blacks to be expressed.



High-output, Long-life Lamp & Quiet performance

The light source is a 230W high-output lamp capable of a long estimated lifetime of up to 5000 hours when operating in low mode. We took fan and color wheel shape into consideration to create a low-noise fan specially designed for cooling efficiency, ensuring impressively low 25dBA quietness when operating in low mode



DDP3021 Full 10-bit Panel Driver

The built-in DDP3021 full 10-bit panel driver creates approximately four times the gradation of 8-bit models, providing smooth expression of dark gradation subtleties.


Blu-ray 24P direct output compatible

Capable of handling an output of 48p, twice the speed of cinema film (24 frames per second), precise timing ensures true-to-life reproduction with original, smooth movement in fast action scenes.

When converting 24 frames per second into 60 frames per second, and lining up the second and third frame surplus third B frame, which

24P direct output With 24p direct output,

24 frames per second is converted to 48 frames per second. This allows sequential matching of two frames at a time, thereby enabling image reproduction with original sequence

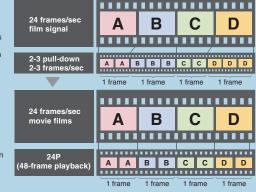

Richer, More True-to-life Colors

The HC3800 is equipped with a six-segment color wheel capable of reproducing standard illumination at the color temperature of D65 (6.5 million colors). Signals from video sources are reproduced with more true-to-life colors and richer gradation.

Color Management for Preferred Color Adjustment

Adjust images to your color preferences: R (red), G (green), B (blue), C (cyan), M (magenta), and Y (yellow) can each be adjusted individually with the built-in color management function.






Anamorphic Lens Compatibility - Choose Setting Based on Media Played

HDMI

NEW HC3800

FULL HD 1080

The anamorphic lens compatibility of the HC3800 widens the projection range of cinema-scope images. Mode 1 proves extended projection and Mode 2 is for images other than cinema-scope that mirror the original with the anamorphic lens attached.

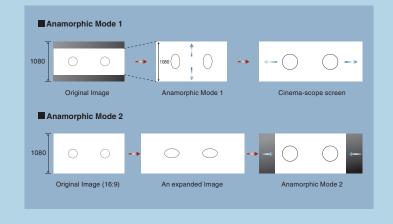

BrilliantColor™

A new color processing algorithm and improvements in system-level color signal quality reproduces many mid-range colors in video and natural scenery for rich, vivid images.

Adjustable Overscan

For images such as those from DVD sources, the overscan ratio can be varied between 90 and 100% in 1% intervals when HDMI components are connected.

One-touch projection

The projector power switch and electric screen (roll down/retract) control are linked, providing a convenient one-touch operation trigger.

Screen Distortion Correction

Correct screen distortion using the shape distortion correction function to adjust up to ±15 steps (1 step approximately 1°) for vertical distortion correction.

■ Projection Distance

*All distances are in inches									
Scre	en size (16:	:9)	Projection distance						
Diagonal	W (width)	H (height)	Hd	Max Zoom	Min Zoom				
50	44	25	8.2	59	89				
60	52	29	9.9	79	107				
70	61	34	11.5	84	125				
80	70	39	13.2	96	144				
90	78	44	14.8	108	162				
100	87	49	16.5	120	180				
110	96	54	18.1	133	198				
120	105	59	19.8	145	216				
150	131	74	24.7	182	271				
200	174	98	33.0	243	362				
250	218	123	41.2	304	453				
300	261	147	49.5	365	-				
**All distances are approximate									

Projected image area

Lw-Lt

■ Projection Installation

Floor mounted

