

COPYRIGHT - 2023

BY LINKO ELECTRIC COPYRIGHT

ECN NO.

N/A

REV.

A1

MODIFICATION

初版发行


DATE

2025/05/22


DRAWN

梁建勇


APPROVED




P1

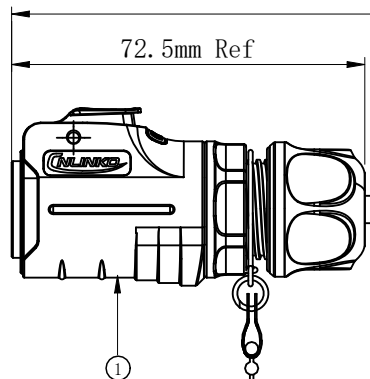

②

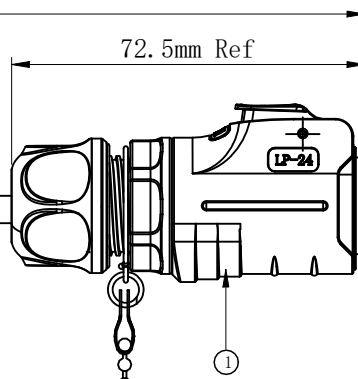光纤线带金属铠
(线上印字“CNLINKO”)

①



P2

SPECIFICATION

1. 插损 INSERTION LOSS: $\leq 0.3\text{db}$;
2. 回损 RETURN LOSS: $\geq 50\text{db}$;
3. CONN : LC/UPC TO LC/UPC 连接头;
4. CABLE: 2根 光纤线材 带金属铠, G657A2 LSZH;
5. 黑线印白字“CNLINKO”;
6. LABEL: C型预制环标签 印字: A L=4.0MM;
7. LABEL: C型预制环标签 印字: B L=4.0MM;
8. 工作/存储温度: $-20 \sim 70^{\circ}\text{C}$;
9. P1, P2端需做灌胶处理;
10. A对A级性, P1/P2端使用双联散件;

PIN_OUT		
P1	颜色	P2
A	红色	A
B	蓝色	B

包装	701-0021-00	线材专用纸箱 480*340*220mm	PCS	A/R	
	703-0061-00	PE风琴袋 0.08X(560+340)X760mm	PCS	A/R	
	703-0013-00	PE袋 (30x40x0.01cm)	PCS	A/R	
②	903-0139-00	LC_UPC-LC_UPC两芯单模光纤线材(带金属铠)_L=1.15M	PCS	1	
①	LP-24-C/LC/016/PE-41-006	LP24型单模双芯光纤公插头塑胶+金属款其它接线(Φ10.5mm尾部密封圈+链条防尘盖)	PCS	2	
序号	料号	名称规格	单位	用量	备注

X.X±0.3 X.XX±0.15 X.XXX±0.100 TOLERANCES UNLESS OTHERWISE SPECIFIED			X°±3° XX°±1.0° 未注圆角R0.2		
DRAWN			梁建勇		
CHECKED			梁银		
APPROVED			宋星亮		
UNIT: mm			SIZE: A4		
SCALE 1: 1			SHEET: 1/1		
PORJ.			SCALE 1: 1		
TITLE:			LP24型光纤双插头LC_UPC-LC_UPC两芯单模光纤线材(带金属铠)_L=1.15M		
P/N:			LP24-F0-MP-MP-1D15M-001A1		